

> 1200 MINI DOUBLE GLASS

DESIGNED FOR AMENITY AND AREA LIGHTING



THE 1200 MINI SERIES IS USED FOR THE LIGHTING OF GARDENS AND FAÇADES UP TO 6M HIGH.

These fittings are extremely versatile, with symmetrical tilting optics and different beam angles.

The double-glass system reduces the temperature of the outer glass up to 60%, enabling these fixtures to be installed in areas accessible to pedestrians, in compliance with EN 60598-2-13.

- Cast aluminium body, phosphochromate treated and powder-painted
- A4 stainless steel screws
- Aluminium locking ring
- PVC sleeve with aluminium fixing ring
- 10mm clear flat tempered glass cover
- Installation in sleeve set in concrete, with a 20-30 cm gravel drain bed.
- Fittings come with one or two 2/3x1 mm² or 2/3x 1.5 mm² Ho7RNF or silicone cables, 1.0m in length
- Versions for other types of lamps are available on request
- Protection rating: IP67 (internal body IP 68 FULL-DRY)
- Breaking strength: IK 10 (24 Joules)




LAMPS

80 34 030 - (80 34 730)*



For GZ 10 50W Lamp
± 15° Tilting Lamp
Glass Temperature 48°C
Weight 2.5 kg

CE Class I




80 34 014 - (80 34 714)*



For GU 5.3 max 50W Lamp
± 15° Tilting Lamp (without transformer)
Glass Temperature 38°C
Weight 2.5 kg

CE Class III




80 34 037 - (80 34 737)*



For GY 6.35 max 50W Lamp
± 15° Tilting Lamp (without transformer)
Glass Temperature 40°C
Weight 2.5 kg

CE Class III




80 34 039 - (80 34 739)*



For GY 6.35 max 50W Lamp
Fixed Lamp (without transformer)
Glass Temperature 40°C
Weight 2.5 kg

CE Class III




80 34 050 - (80 34 750)*



For HALOPAR 20 max 50W Lamp
Fixed Lamp
Glass Temperature 53°C
Weight 2.5 kg


CE Class I



*Comes with 2 in/out cables

Photometric data refer to the standard version

80 34 030
80 34 014
80 34 037
80 34 039
80 34 050

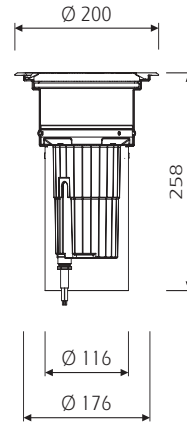

Sleeve included

ACCESSORIES



89 17 003
IP 68 Junction Box
With Gel
89 17 000
IP 67 Quick Connector



89 49 001
4x anti-vandalism
screws +1 Tool



89 23 000
Anti-glare louver (not
suitable for versions
with LED)



89 56 005
External transformer
50VA IP67 230-12V



89 18 701*
Flat BLUE Dichroic
Glass
89 18 702*
Flat RED Dichroic
Glass



89 18 703*
Flat YELLOW Dichroic
Glass
89 18 704*
Flat GREEN Dichroic
Glass
89 18 720
Flat ETCHED Glass

*Supplied to replace the inner glass



KENDELIER LIGHTING LIMITED
25 AINTREE AVE
AIRPORT OAKS
AUCKLAND
NEW ZEALAND

TEL +64 9 915 1083
FAX +64 9 915 1087

SALES@KENDELIER.CO.NZ
WWW.KENDELIER.CO.NZ

NZ FREE 0800 536 335
AUSTRALIA FREE 1800 553 817