

> 2100 MEDIO INOX DOUBLE GLASS

DESIGNED FOR AMENITY AND AREA LIGHTING



THE 2100 MEDIO SERIES IS USED FOR THE LIGHTING OF GARDENS AND FAÇADES UP TO 15 M HIGH. THESE FITTINGS ARE EXTREMELY VERSATILE, WITH SYMMETRICAL TILTABLE OPTICS, WITH DIFFERENT BEAM ANGLES.

Fittings that use a G12 lamp come with a rapid reflector-fixing system that allows the lighting effect to be adjusted as required.

The double glass system reduces the temperature of the outer glass by up to 60%, enabling these fixtures to be installed in areas accessible to pedestrians, in compliance with EN 60598-2-13.

- Cast aluminium body, phosphochromate treated and powder-painted
- A4 stainless steel screws
- AISI 316 stainless steel locking ring
- PVC sleeve with aluminium fixing ring
- 12mm clear flat tempered glass cover
- Installation in sleeve set in concrete, with a 20-30 cm gravel drain bed
- Fittings come with one or two 3x 1.5 mm² or 3x 2.5 mm² Ho7RNF cables, 1m in length
- Versions for other types of lamps are available on request
- Protection rating: IP 67 (internal body IP 68 FULL-DRY)
- Breaking strength: IK 10 (58 Joules)




LAMPS

○80 68 073 - (80 68 773)*
□80 69 073 - (80 69 773)*
 For AR 111 max 75W Lamp
 +15° Tilting Lamp
 Glass Temperature 104°C
 Weight 8.1 kg




CE Class 1



○80 68 110 - (80 68 710)*
□80 69 110 - (80 69 710)*
 For HQI-G12 70W Lamp
 +15° Tilting Lamp
 Glass Temperature 78°C
 Weight 9.1 kg




CE Class 1



○80 68 033 - (80 68 733)*
□80 69 033 - (80 69 733)*
 For HALOPAR 30 Max 75W Lamp
 +15° Tilting Lamp
 Glass Temperature 103°C
 Weight 6.4 kg




CE Class 1



○80 68 111 - (80 68 711)*
□80 69 033 - (80 69 711)*
 For HQI-G12 70W Lamp
 +15° Tilting Lamp
 Glass Temperature 75°C
 Weight 9.1 kg




CE Class 1



○80 68 080 - (80 68 780)*
□80 69 080 - (80 69 780)*
 For HQI-G12 35W Lamp
 +15° Tilting Lamp
 Glass Temperature 57°C
 Weight 8.8 kg





CE Class 1



○80 68 134 - (80 68 734)*
□80 69 134 - (80 69 734)*
 HQI-TS/SH-PS 70W Lamp
 +15° Tilting Lamp
 Glass Temperature 77°C
 Weight 9.1 kg




CE Class 1



○80 68 081 - (80 68 781)*
□80 69 081 - (80 69 781)*
 For HQI-G12 35W Lamp
 +15° Tilting Lamp
 Glass Temperature 56°C
 Weight 8.8 kg





CE Class 1



*Comes with 2 in/out cables

Photometric data refer to the standard version

80 68 073
80 68 033
80 68 080
80 68 081
80 68 110
80 68 111
80 68 134

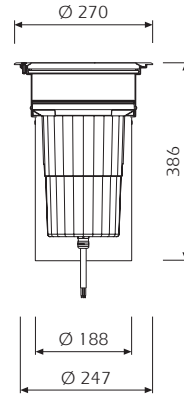

Sleeve Included

ACCESSORIES



89 17 003
 IP 68 Junction Box
 with Gel
89 17 000
 IP 67 Quick Connector



89 49 015
 3 Anti-vandalism
 Screws + 1 tool



89 26 000
 Anti-glare Louver



89 18 620
 Flat ETCHED
 Glass



89 18 601*
 Flat BLUE Dichroic
 Glass



89 18 603*
 Flat YELLOW
 Dichroic Glass



89 18 602*
 Flat RED Dichroic
 Glass



89 18 604*
 Flat GREEN
 Dichroic Glass

*Supplied to replace the inner glass



KENDELIER LIGHTING LIMITED
 25 AINTREE AVE
 AIRPORT OAKS
 AUCKLAND
 NEW ZEALAND

TEL +64 9 915 1083
 FAX +64 9 915 1087

SALES@KENDELIER.CO.NZ
 WWW.KENDELIER.CO.NZ

NZ FREE 0800 536 335
 AUSTRALIA FREE 1800 553 817