

## > 2100 MEDIO DOUBLE GLASS

DESIGNED FOR AMENITY AND AREA LIGHTING



**THE 2100 MEDIO SERIES IS USED FOR THE LIGHTING OF GARDENS AND FAÇADES UP TO 15 M HIGH. THESE FITTINGS ARE EXTREMELY VERSATILE, WITH SYMMETRICAL TILTABLE OPTICS, WITH DIFFERENT BEAM ANGLES.**

Fittings that use a G12 lamp come with a rapid reflector-fixing system that allows the lighting effect to be adjusted as required.

The double glass system reduces the temperature of the outer glass by up to 60%, enabling these fixtures to be installed in areas accessible to pedestrians, in compliance with EN 60598-2-13.

- Cast aluminium body, phosphochromate treated and powder-painted
- A4 stainless steel screws
- Aluminium locking ring
- PVC sleeve with aluminium fixing ring
- 12mm clear flat tempered glass cover
- Installation in sleeve set in concrete, with a 20-30 cm gravel drain bed
- Fittings come with one or two 3x 1.5mm<sup>2</sup> or 3x 2.5mm<sup>2</sup> Ho7RNF cables, 1m in length
- Versions for other types of lamps are available on request
- Protection rating: IP 67 (internal body IP 68 FULL-DRY)
- Breaking strength: IK 10 (58 Joules)




# LAMPS

## 80 38 073 - (80 38 773)\*

For AR 111 Max 75W Lamp  
+15° Tilting Lamp  
Glass Temperature 104°C  
Weight 8 kg



CE Class 1



## 80 38 110 - (80 38 710)\*

For HQI-G12 70W Lamp  
+15° Tilting Lamp  
Glass Temperature 78°C  
Weight 9 kg


CE Class 1



## 80 38 033 - (80 38 733)\*

For HALOPAR 30 Max 75W Lamp  
+15° Tilting Lamp  
Glass Temperature 103°C  
Weight 16.3 kg


CE Class 1



## 80 38 111 - (80 38 711)\*

For HQI-G12 70W Lamp  
+15° Tilting Lamp  
Glass Temperature 75°C  
Weight 9 kg


CE Class 1



## 80 38 080 - (80 38 780)\*

For HQI-G12 35W Lamp  
+15° Tilting Lamp  
Glass Temperature 57°C  
Weight 8.7 kg



CE Class 1



## 80 38 134 - (80 38 734)\*

For HQI-TS/SHP-TS 70W Lamp  
+15° Tilting Lamp  
Glass Temperature 77°C  
Weight 9 kg


CE Class 1



## 80 38 081 - (80 38 781)\*

For HQI-G12 35W Lamp  
+15° Tilting Lamp  
Glass Temperature 56°C  
Weight 8.7 kg


CE Class 1



\*Comes with 2 in/out cables

Photometric data refer to the standard version

80 38 073  
80 38 033  
80 38 080  
80 38 081  
80 38 110  
80 38 111  
80 38 134

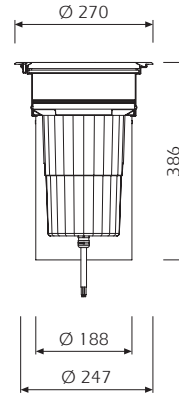

Sleeve included

# ACCESSORIES



89 17 003  
IP 68 Junction Box  
with Gel  
89 17 000  
IP 67 Quick Connector



89 49 015  
3 Anti-vandalism  
Screws + 1 tool



89 26 000  
Anti-glare Louver



89 18 620  
Flat ETCHED  
Glass



89 18 601\*  
Flat BLUE Dichroic  
Glass



89 18 603\*  
Flat YELLOW  
Dichroic Glass



89 18 602\*  
Flat RED Dichroic  
Glass



89 18 604\*  
Flat GREEN  
Dichroic Glass

\*Supplied to replace the inner glass



KENDELIER LIGHTING LIMITED  
25 AINTREE AVE  
AIRPORT OAKS  
AUCKLAND  
NEW ZEALAND

TEL +64 9 915 1083  
FAX +64 9 915 1087

SALES@KENDELIER.CO.NZ  
WWW.KENDELIER.CO.NZ

NZ FREE 0800 536 335  
AUSTRALIA FREE 1800 553 817