


# > 2600 ATLANTIQUE

DESIGNED FOR LIGHTING OF GARDENS & FAÇADES

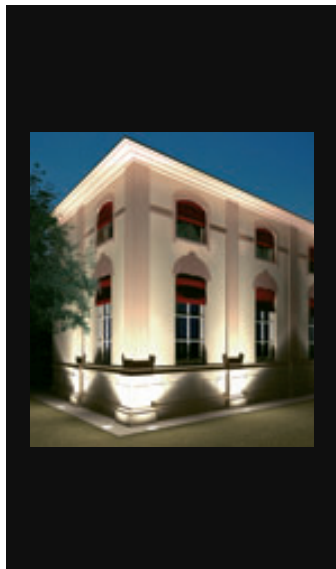

**THE 2600 ATLANTIQUE SERIES IS USED FOR THE LIGHTING OF GARDENS AND FAÇADES UP TO 18M HIGH.**

These fittings are extremely versatile, with symmetrical optics, different beam angles and asymmetrical reflectors.

The top locking ring is available in AISI 316 stainless steel and increases resistance to mechanical stress and atmospheric agents. It is recommended for heavy-duty applications, such as in areas where they are driven over or near the sea. As they only require a 162 mm recess, they can also be used when a shallow depth is available.

- Cast aluminium body, phosphochromate treated and powder-painted
- Cast aluminium or AISI 316 stainless steel locking ring
- A4 stainless steel screws
- Aluminium sleeve (to be ordered separately)
- 12 mm clear flat tempered glass cover
- Installation in sleeve set in concrete, with a 20-30 cm gravel drain bed
- Fittings come with one or two 3x 1.5mm<sup>2</sup> Ho7RNF cables, 3.0 m in length
- Versions for other types of lamps are available on request
- Protection rating: IP 68 FULL-DRY
- Roll-over weight: 4500 Kg
- Breaking strength: IK 10 (58 Joules)




# LAMPS

## 80 20 174 - (80 20 774)\*



For DULUX T 26W Lamp  
Fixed Lamp  
Glass Temperature 73°C  
Weight 7.5 kg

CE Class 1





## 80 20 036 - (80 20 736)\*



For HQI-G12 70W Lamp  
Fixed Lamp  
Glass Temperature 130°C  
Weight 8 kg

CE Class 1




## 80 20 055 - (80 20 755)\*



For HQI-G12 35W Lamp  
Fixed Lamp  
Glass Temperature 80°C  
Weight 7.8 kg

CE Class 1




## 80 20 044 - (80 20 744)\*



For HQI-G12 70W Lamp  
Fixed Lamp  
Glass Temperature 111°C  
Weight 8 kg

CE Class 1





## 80 20 056 - (80 20 756)\*



For HQI-G12 35W Lamp  
Fixed Lamp  
Glass Temperature 78°C  
Weight 7.8 kg

CE Class 1




## 80 20 163 - (80 20 763)\*




For HQI-TS/SHP-TS 70W Lamp  
Fixed Lamp - Asym. Optic (θ 100°)  
Glass Temperature 120°C  
Weight 8 kg

CE Class 1



\*Comes with 2 in/out cables

- 80 20 174
- 80 20 055
- 80 20 056
- 80 20 036
- 80 20 044
- 80 20 163



Sleeve  
89 36 000

# ACCESSORIES



**89 18 100**  
Prismatic Glass  
Activa 10°



**89 18 400**  
Lens Concentra



**89 18 300**  
Convex Clear  
Glass



**89 22 000**  
Anti-vandalism  
Protected Grid  
"GPA"



**89 18 201**  
Flat BLUE Dichroic  
Glass



**89 18 203**  
Flat YELLOW  
Dichroic Glass



**89 18 202**  
Flat RED Dichroic  
Glass



**89 18 204**  
Flat GREEN  
Dichroic Glass



**89 18 205**  
Flat ETCHED  
Glass



**89 17 003**  
IP 68 Junction Box  
with Gel  
**89 17 000**  
IP 67 Quick  
Connector



**89 49 004**  
8 x Anti-  
vandalism  
Screws + 1 Tool



**89 20 000**  
AISI 316  
Round Stainless  
Steel Ring



**89 36 000**  
Sleeve



KENDELIER LIGHTING LIMITED  
25 AINTREE AVE  
AIRPORT OAKS  
AUCKLAND  
NEW ZEALAND

TEL +64 9 915 1083  
FAX +64 9 915 1087

SALES@KENDELIER.CO.NZ  
WWW.KENDELIER.CO.NZ

NZ FREE 0800 536 335  
AUSTRALIA FREE 1800 553 817