

> CUMBRE COLUMN

DESIGNED FOR AMENITY AND AREA LIGHTING

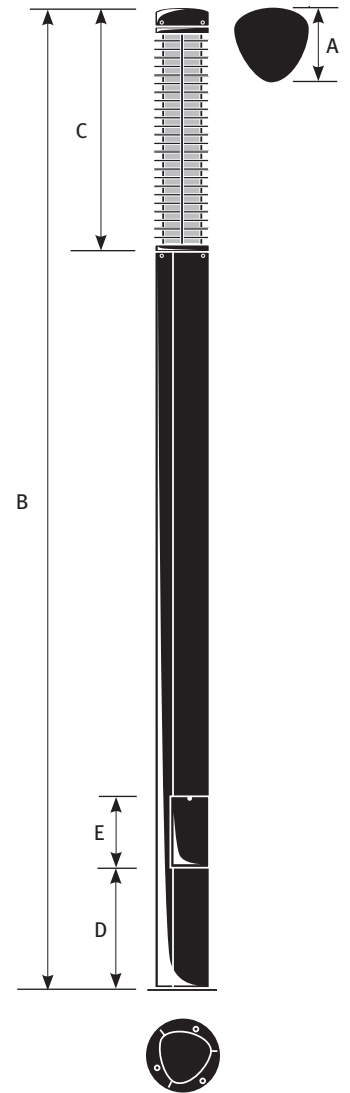


TECHNICAL DESCRIPTION



Column	Extruded aluminium. Inspection door 500mm above ground level for gear access.
Column Mounting	Flange mount (M16 x 500mm bolts)
Reflector	Anodized aluminium louvers
Enclosure	Opal methacrylate diffuser. Lamp access from the top.
Finishes	RAL 9011 Graphite black or forge grey (alternative colour options on request)
Protection	IP54 IK10

DIMENSIONS

Type	A	B	C	D	E
CBRC-1.F/OPMT.SY	220	4000	1000	500	300



LAMPS

-  **ES (E-27)**
HPS (3x 70W)
-  **2G11**
FL (4x 55W)



Could be used in conjunction with the Cumbre Bollard

FOR MORE INFORMATION PLEASE VISIT
WWW.KENDELIER.COM

