

> PECHINA

LUMINAIRES DESIGNED FOR MAIN ROADS, RESIDENTIAL
ROADWAYS AND DUAL CARRIAGE WAYS




TECHNICAL DESCRIPTION

Body	Pressure die-cast aluminium
Canopy	Pressure die-cast aluminium. Gear and lamp access from the top
Reflector	Anodized and sealed single piece aluminium
Enclosure	Curved toughened glass sealed onto reflector
Mounting	Lateral - Ø60mm or vertical Ø60mm or 76mm (adaptors available)
Finishes	Body - Light Grey standard. (alternative colour options on request)
Optic Water Tight	IP-66
Windage	0.330m ²



PCN-250 Gear Access



PCN-250/CLFG.SR Clear Flat Toughened Glass






PCN-250/CLCG.SR Clear Curved Toughened Glass

DIMENSIONS AND WEIGHTS




Type	LENGTH mm	WIDTH mm	HEIGHT mm	WEIGHT kg
PCN-250/CLFG	785	710	245	16.4
PCN-250/CLCG	785	710	270	16.5


LAMPS

PCN-250/CLFG.SR

	ES (E-27) MH 100
	GES (E-40) HPS 100 HPS 150 HPS 250
	MH 150 MH 250

PCN-250/CLCG.SR

	ES (E-27) MH 100
	GES (E-40) HPS 100 HPS 150 HPS 250
	MH 150 MH 250

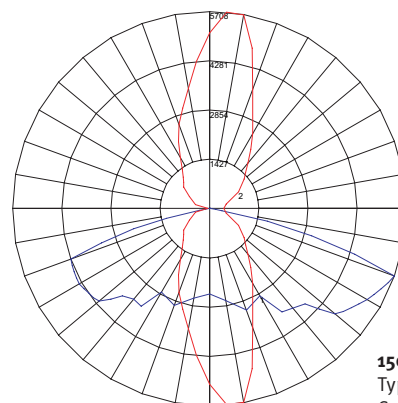

150W HPS
Typical Polar
Curve



KENDELIER LIGHTING LIMITED
25 AINTREE AVE
AIRPORT OAKS
AUCKLAND
NEW ZEALAND

TEL +64 9 915 1083
FAX +64 9 915 1087

SALES@KENDELIER.CO.NZ
WWW.KENDELIER.CO.NZ

NZ FREE 0800 536 335
AUSTRALIA FREE 1800 553 817