


> SIGMA

DESIGNED FOR AMENITY AND AREA LIGHTING



TECHNICAL DESCRIPTION

Body	Pressure die-cast aluminium
Canopy	Pressure die-cast aluminium. Also gear access with a power cut-off micro switch when opened
Reflector	Extruded electro-anodised single piece aluminium
Enclosure	Curved glass
Mounting	Vertical or side mounting - Ø 60mm x 100mm
Finishes	Forge grey or RAL 9011 graphite black (alternative colour options on request).
Protection	IP-66 IK10

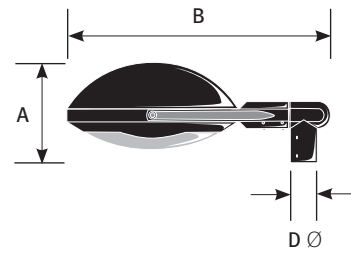


SGMA-10/CLCG.SR

Side Mounting

DIMENSIONS AND WEIGHTS





Type	A	B	C	D Ø
SGMA-10/CLCG.SR	290	818	-	78
SGMA-25/CLCG.SR	556	666	505	78

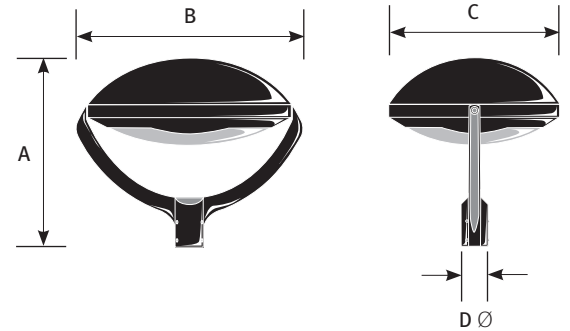


SGMA-25/CLCG.SR

Pole Mounting

LAMPS

	ES (E-27) HPS 70W
	MH 70W
	GES (E-40) HPS 100W HPS 150W HPS 250
	MH 150W MH 250W

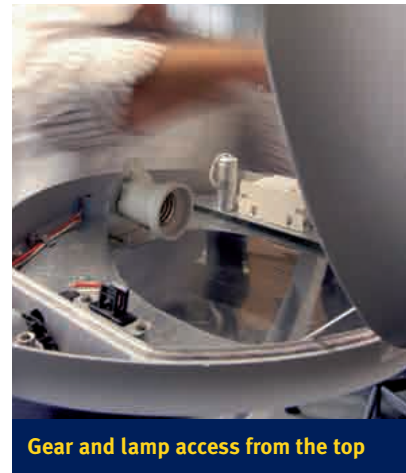

Gear and lamp access from the top

FOR MORE INFORMATION PLEASE VISIT
WWW.KENDELIER.COM

