

> WESTMINSTER

LUMINAIRES DESIGNED FOR MAIN ROADS, RESIDENTIAL
ROADWAYS AND DUAL CARRIAGE WAYS



TECHNICAL DESCRIPTION

Body	Cast aluminium CC601E. Gear access from top
Reflector	Anodized aluminium or refractor AS
Enclosure	Toughened glass
Mounting	Vertical - Ø76mm (Top mount option VESI spigot Ø46mm)
Finishes	Polyester powder coat to colour of choice (Wet paint option available on request)
Optic Water Tight	IP-65
Windage	0.198m ²




Lamp Access


Standard

DIMENSIONS AND WEIGHTS

Type	WIDTH mm		HEIGHT mm	WEIGHT kg
WT-23/CLTG	460 Across Corners	375 Across Sides	760	10.9
WT-25/CLTG	460 Across Corners	375 Across Sides	930	11.8



WT-23

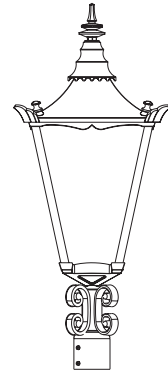

WT-25

LAMPS

WT- /CLTG.SR



ES (E-27)

HPS 50
HPS 70



MH 50
MH 70
MH 100

WT- /CLTG.RF.AS



ES (E-27)

HPS 50
HPS 70




MH 50
MH 70
MH 100



GES (E-40)

HPS 100

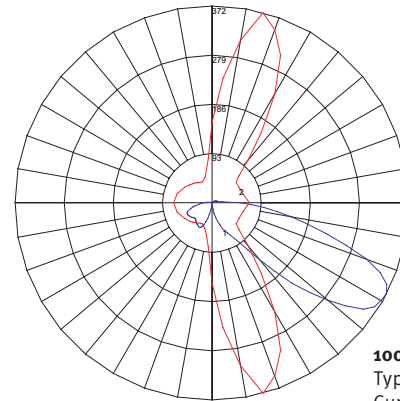

100W MH
Typical Polar
Curve



KENDELIER LIGHTING LIMITED
25 AINTREE AVE
AIRPORT OAKS
AUCKLAND
NEW ZEALAND

TEL +64 9 915 1083
FAX +64 9 915 1087

SALES@KENDELIER.CO.NZ
WWW.KENDELIER.CO.NZ

NZ FREE 0800 536 335
AUSTRALIA FREE 1800 553 817