

> PRINCETON BOLLARD

DESIGNED FOR OPEN SPACES AND PUBLIC AREAS



TECHNICAL DESCRIPTION

Top	Cap and louvers 2mm mild steel
Tube	Mild steel pipe, hot dipped galvanized after fabrication
Enclosure	Acrylics lens
Mounting	Ground plant (G) or flange mount (F)
Finishes	Polyester powder coat to colour of choice (wet paint option available in request)

DIMENSIONS

Type	A Ø	B	C Ø	D
PNCB-800.F/CLAT.SY	165	800	230	-
PNCB-800.G/CLAT.SY	165	800	-	500
PNCB-1000.F/CLAT.SY	165	1000	230	-
PNCB-1000.G/CLAT.SY	165	1000	-	500

LAMPS

ES (E-27)



FL 15W
FL 20W
FL 24W

G24d-3




FL 26W


Gx24q-3



FL 32W

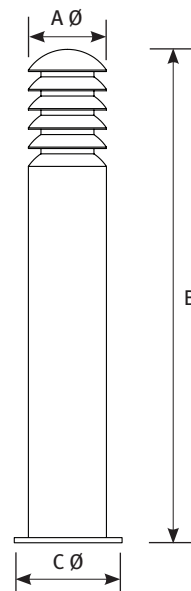

Flange Mount (F)

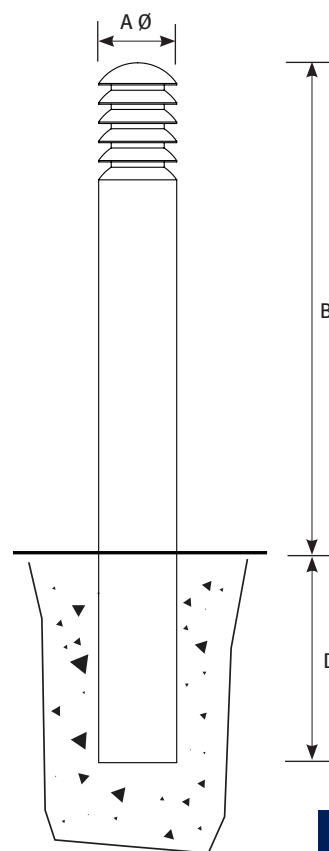

Ground Plant (G)

FOR MORE INFORMATION PLEASE VISIT

WWW.KENDELIER.COM

