


> 2600 ATLANTIQUE DOUBLE GLASS

DESIGNED FOR LIGHTING OF GARDENS & FAÇADES

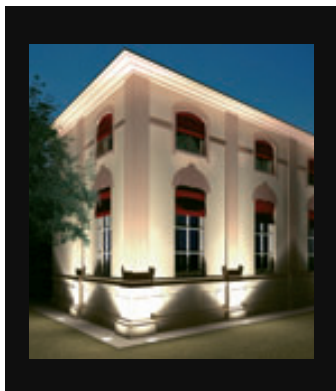

THE 2600 ATLANTIQUE DOUBLE GLASS SERIES IS USED FOR THE LIGHTING OF GARDENS AND FAÇADES UP TO 18M HIGH.

These fittings are extremely versatile, with symmetrical optics, different beam angles and asymmetrical reflectors.

The double-glass system reduces the temperature of the outer glass up to 60%, enabling these fixtures to be installed in areas accessible to pedestrians, in compliance with EN 60598-2-13.

- Cast aluminium body, phosphochromate treated and powder-painted
- Cast aluminium locking ring
- Anti-vandalism A4 stainless steel screws
- PVC sleeve with aluminium fixing ring
- 12 mm clear flat tempered glass cover
- Installation in sleeve set in concrete, with a 20-30 cm gravel drain bed
- Fittings come with one or two 3x 1.5mm² Ho7RNF cables, 3.0 m in length
- Versions for other types of lamps are available on request
- Protection rating: IP 68 FULL-DRY
- Roll-over weight: 7000 Kg
- Breaking strength: IK 10 (58 Joules)




LAMPS

80 21 055 - (80 21 755)*

For HQI-G12 35W Lamp
Fixed Lamp
Glass Temperature 55°C
Weight 11.7 kg


CE Class 1



80 21 044 - (80 21 744)*

For HQI-G12 70W Lamp
Fixed Lamp
Glass Temperature 60°C
Weight 11.9 kg



CE Class 1



80 21 056 - (80 21 756)*

For HQI-G12 35W Lamp
Fixed Lamp
Glass Temperature 50°C
Weight 11.7 kg



CE Class 1



80 21 150

For HQI-G12 150W Lamp
Fixed Lamp (without power supply)
Glass Temperature 90°C
Weight 9.8 kg



CE Class 1



80 21 036 - (80 21 736)*

For HQI-G12 70W Lamp
Fixed Lamp
Glass Temperature 78°C
Weight 11.9 kg



CE Class 1



80 21 151

For HQI-G12 150W Lamp
Fixed Lamp (without power supply)
Glass Temperature 88°C

CE Class 1




*Comes with 2 in/out cables

Photometric data refer to the standard version

80 21 055
80 21 056
80 21 036
80 21 044
80 21 150
80 21 151

Sleeve
Included



ACCESSORIES



89 18 100
Prismatic Glass
Activa 10°



89 18 400
Lens Concentra



89 18 201
Flat BLUE Dichroic
Glass



89 18 203
Flat YELLOW
Dichroic Glass



89 18 202
Flat RED Dichroic
Glass



89 18 204
Flat GREEN
Dichroic Glass



89 17 003
IP 68 Junction Box
with Gel
89 17 000
IP 67 Quick
Connector



89 56 015
IP 67 External Power
Supply for Lamps
HQI-G12 150W



89 04 000
Anti-vandalism
Protected Grid
"GPA"



KENDELIER LIGHTING LIMITED
25 AINTREE AVE
AIRPORT OAKS
AUCKLAND
NEW ZEALAND

TEL +64 9 915 1083
FAX +64 9 915 1087

SALES@KENDELIER.CO.NZ
WWW.KENDELIER.CO.NZ

NZ FREE 0800 536 335
AUSTRALIA FREE 1800 553 817