

> ARC 80/90

LUMINAIRES DESIGNED FOR MAIN ROADS, MOTORWAYS, DUAL CARRIAGE WAYS,
RESIDENTIAL ROADWAYS AND CARPARKS





> ARC 80/90



ARC 80 /CLFG.SR Clear Flat Toughened Glass

ARC 90/CLFG.SR Clear Flat Toughened Glass



ARC 80 /CLCG.SR Clear Curved Toughened Glass

ARC 90 /CLCG.SR Clear Curved Toughened Glass

TECHNICAL DESCRIPTION

Body	Pressure die-cast aluminium
Canopy	Pressure die-cast aluminium. Gear and lamp access from the top (Automatic power disconnection when canopy opened)
Reflector	Faceted optical technology - FOT a computer designed single piece aluminium
Enclosure	Flat glass, curved glass or a polycarbonate bowl sealed onto the reflector for the ARC 80, or flat glass or curved glass for the ARC 90
Mounting	Lateral - Ø60mm or vertical Ø60-76mm (adaptors available). Tilt angle 0° + 5° + 10° in both post top and side entry
Finishes	Body - RAL9007 Silver Standard (Alternative colour options on request)
Optic Water Tight	IP-66
Windage	0.0600m ² - ARC 80 / 0.0700m ² - ARC 90



Gear Access Standard



Auto Power Disconnection Standard




Toolless Maintenance Standard


DIMENSIONS AND WEIGHTS

Type	LENGTH mm	WIDTH mm	HEIGHT mm	WEIGHT kg
ARC 80 ARC-80/CLFG.SR ARC-80/CLCG.SR	670	325	190	7-10
	670	325	240	7-10
ARC 90 ARC-90/CLFG.SR ARC-90/CLCG.SR	775	380	200	11-14
	775	380	250	11-14

Flat Glass



Curved Glass



LAMPS

ARC-80

ES (E-27)

HPS 50
HPS 70



MH 70
MH 150



GES (E-40)

HPS 100
HPS 150




ARC-90

GES (E-40)

HPS 150
HPS 250
HPS 400



MH 250
MH 400

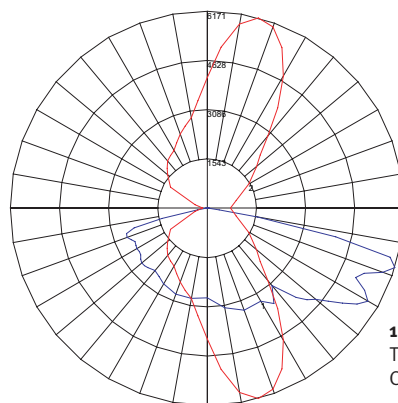

150W HPS
Typical Polar
Curve



KENDELIER LIGHTING LIMITED
25 AINTREE AVE
AIRPORT OAKS
AUCKLAND
NEW ZEALAND

TEL +64 9 915 1083
FAX +64 9 915 1087

SALES@KENDELIER.CO.NZ
WWW.KENDELIER.CO.NZ

NZ FREE 0800 536 335
AUSTRALIA FREE 1800 553 817